


PLAN VIEW

NOTE:
MINIMUM GUTTER SLOPE: 0.004 FT/FT

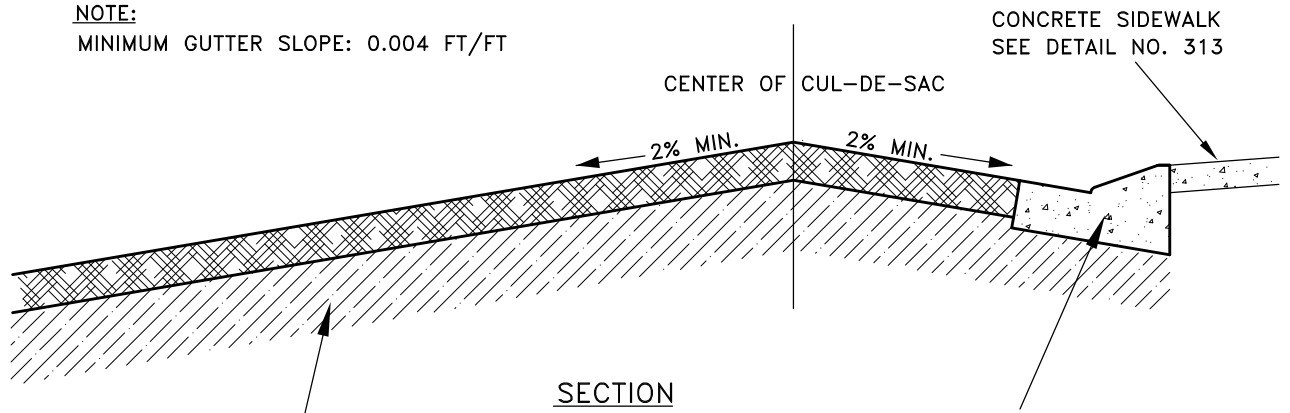

SECTION

FOR STANDARD PAVEMENT SECTION
SEE DETAIL DWG. NO. 301

NOTE:

THE TRANSITION FROM STANDARD CURB AND GUTTER TO ROLLED CURB AND GUTTER SHALL BE 12 - 36 INCHES LINEAR DISTANCE TANGENT FROM THE POINT OF CURVATURE OF THE CUL-DE-SAC BULB.

CITY OF ALBANY, OREGON PUBLIC WORKS DEPARTMENT		
36' CUL-DE-SAC STANDARD DETAIL		
NO SCALE	MAY 2009	NO. 303